


WATER LEVEL CONTROL

Warning: Some sealants can destroy plastics. Use an approved sealant on the float assembly.

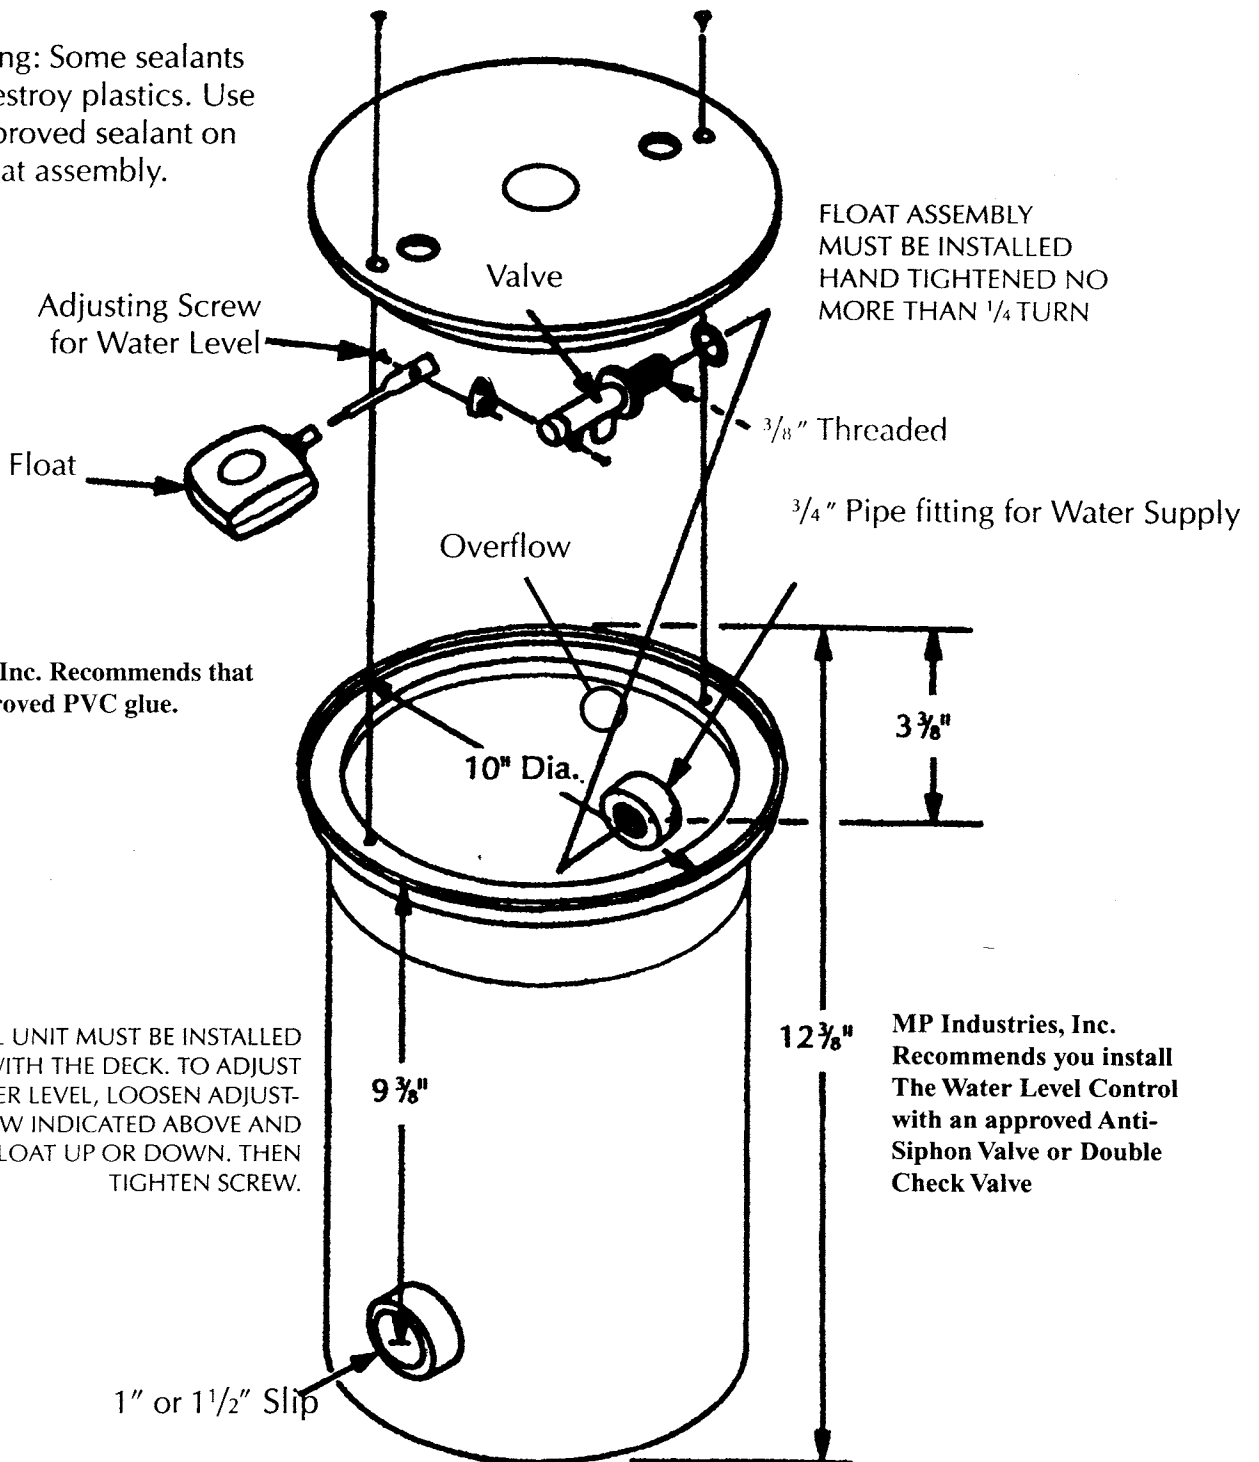

MP Industries, Inc. Recommends that you use an approved PVC glue.


AUTO FILL UNIT MUST BE INSTALLED FLUSH WITH THE DECK. TO ADJUST FOR WATER LEVEL, LOOSEN ADJUSTING SCREW INDICATED ABOVE AND MOVE FLOAT UP OR DOWN. THEN TIGHTEN SCREW.

MP Industries, Inc. Recommends you install The Water Level Control with an approved Anti-Siphon Valve or Double Check Valve

Automatic Water Leveler 1953-J


MP INDUSTRIES, INC.

The Water Level Control is equipped with an overflow protection device. If the overflow is not desired, glue the 1/2" plug that is provided for you. Use a PVC glue on the plug to close up the overflow.

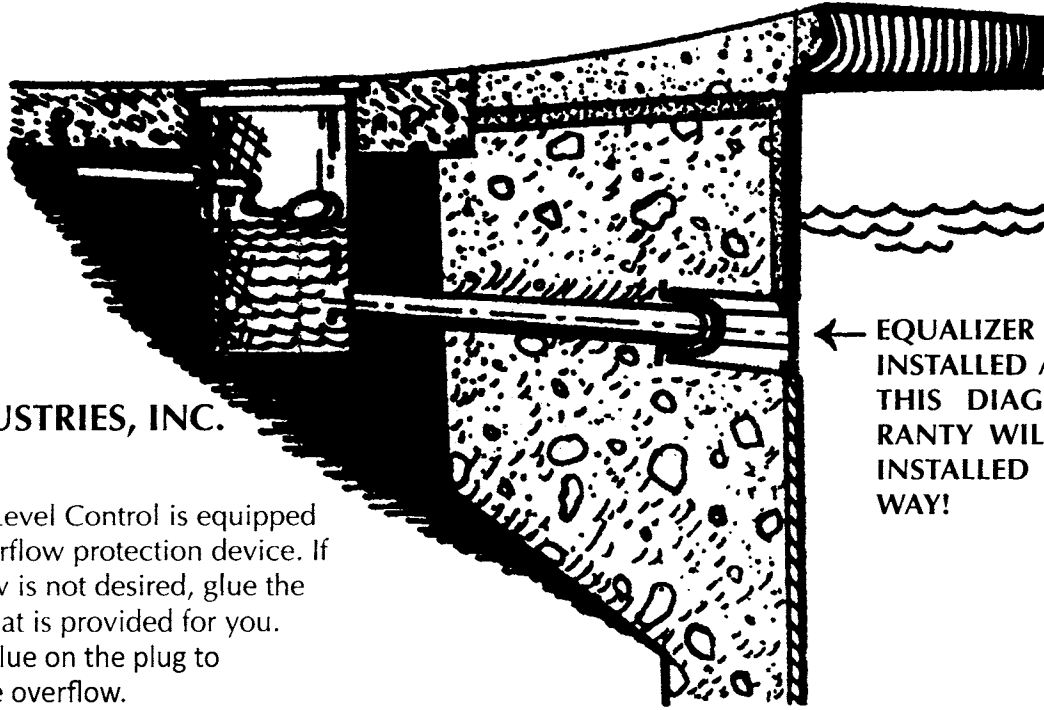

← EQUALIZER LINE MUST BE INSTALLED AS SHOWN IN THIS DIAGRAM. WARRANTY WILL BE VOID IF INSTALLED ANY OTHER WAY!

For Swimming Pool

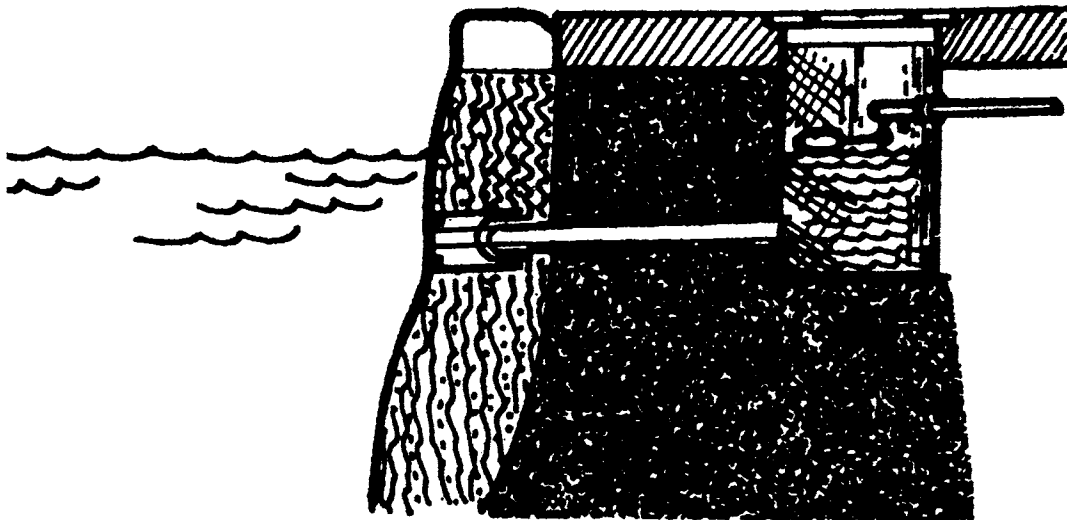

and Spa

Customer agrees that it will be solely responsible for monitoring the use of the Product. Under no circumstances shall MP Industries, Inc. be liable for any costs or damages arising from wasted or excess water usage. Customer agrees that MP Industries, Inc.'s maximum liability for any claim brought by customer against MP Industries, Inc. whether arising in contract, tort, or otherwise, shall be limited to the amount actually paid by Customer for the Product.